



Modelo: 1107 EXD

Motor

Marca	Fiat
Modelo	S8000 TIER III
Tipo	Enfriado por angua, cuatro tiempos, Turbocargado
Cilindraje	4
Potencia	100 HP
Velocidad	2200 RPM
Tipo de combustible	Diesel

Sistema de vibración

Rueda vibratoria	Delantera
Fuerza de salida	27 bar
Tipo de potencia	Motor de desplazamiento con piston con desplazamiento electrico

Sistema de aspersión

Tipo	Spray de agua a presión intermitente
------	--------------------------------------


Capacidad

Aceite Hidráulico	70 L	Anticongelante	15 L
Combustible	235 L		
Aceite Motor	9..1 L		

Avance

Tipo	Bomba de desplazamiento variable.
Tipo	Mecanica

GENERAL DIMENSIONS

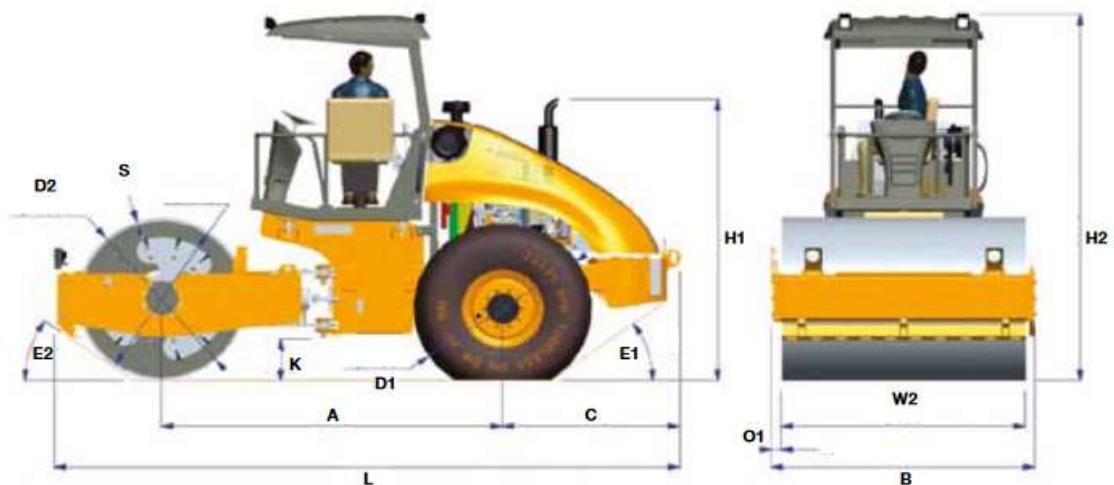

DIMENSIONS

A	Horizontal distance from drum center to tyre center	mm	3003
B	Overall width of the machine	mm	2324
C	Rear overhang	mm	1562
D1	Diameter of the rear tyres	mm	1528
D2	Diameter of the drum	mm	1500
H1	Height of silencer from ground level	mm	2561
H2	Overall height of the machine (in transport)	mm	3373
K	Ground clearance	mm	382
L	Overall length of the machine	mm	5508
O1	Side overhang	mm	87
S	Drum shell thickness	mm	32
W2	Overall width of the drum	mm	2150
E1	Rear Departure angle	mm	36
E2	Front Departure angle	mm	35

Peso

Operacional	11,080 kg
Eje Delantero	6,480 kg
Eje Trasero	4,600 kg